

## **PH CMP-1032 DUAL COMPONENT PUMP**



### **APPLICATIONS**

- Bonding
- Sealing
- Rock Crusher Repair
- Filling

### **MATERIALS**

- Silicones
- Epoxies
- Urethanes

### **FEATURES AND BENEFITS**

- AST CMP metering pump
- Viscosities up to 30,000 cps
- Pneumatic powered
- Continuous flow up to 2 gpm
- System diagnostic check available
- Fluid pressures up to 3,000 psi
- Metered shots or continuous flow
- Automatic dispense valve
- Adjustable flow rate
- Handles abrasive materials


# PH CMP-1032 DUAL COMPONENT PUMP



## PRODUCT SPECIFICATIONS

Applications for the PH 1032 DUAL COMPONENT PUMP for Silicones, Urethanes, Epoxies and General Adhesives include:

- Sealing
- Bonding

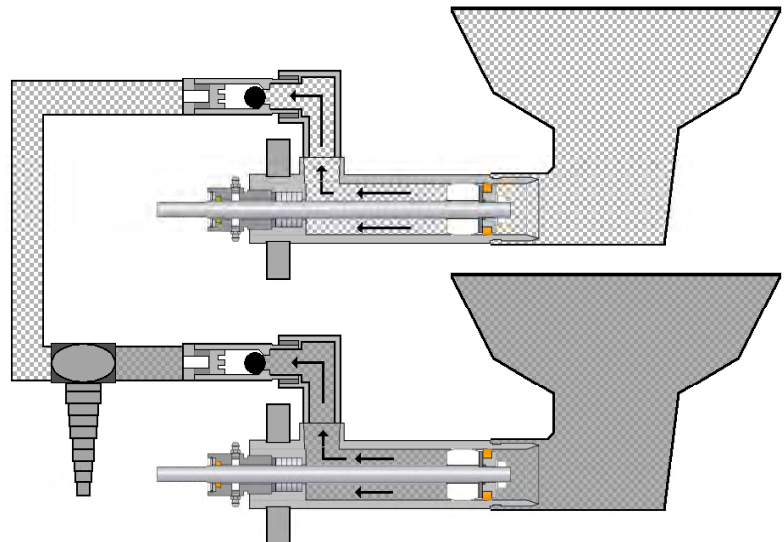

<b>MODEL</b>	PH CMP-1032	<b>RATIO RANGE</b>	4:1 – 10:1
<b>DRIVE SYSTEM</b>	8" – 10" Dia. Air Cylinder	<b>CYCLE RATE</b>	Up to 30 cycles per minute
<b>OUTPUT</b>	Up to 2 gpm depending on size, viscosity & hose	<b>DISPENSE MANIFOLD</b>	Manual or Automatic; Fixed or hand-held
<b>CONTAINERS</b>	8-1/2 or 55 Gal.	<b>POWER FACTOR</b>	10:1 – 30:1
<b>VISCOSITY RANGE</b>	1 – 30,000 cps	<b>SHOT SIZE</b>	Up to 0.25 gal. per stroke
<b>ACCURACY</b>	Within 2% of shot	<b>STROKE SIZE</b>	Up to 9" per stroke
<b>CONTROLS</b>	Pneumatic/On-Off switch	<b>SHOT ADJUSTMENT</b>	0 - 100% of full stroke

NOTE: High viscosity materials may need to be heated to help lower viscosity and improve mix quality.

**ADHESIVE SYSTEMS TECHNOLOGY CORP.**  
 9000 Science Center Drive, New Hope, MN 55428  
 Phone: 763-592-2060 • Fax: 763-592-2075  
 www.ast-corp.net • ast@ast-corp.net