



METER-MIX DISPENSE EQUIPMENT

METERING & DISPENSING EQUIPMENT FOR THE PROFESSIONAL CONTRACTOR

PCH DRP-6424



APPLICATIONS

- JOINT FILLING
- SPRAY

MATERIALS

- FILLED & ABRASIVE URETHANES
- FILLED & ABRASIVE EPOXIES


FEATURES & BENEFITS

- Portable
- Reliable, rugged design
- Easy to Operate and Maintain
- Uses AST Double Acting Rod Pump
- 6 Gallon Stainless Steel Tank
- Disposable Liner Assembly
- Pneumatic Powered
- Compact Frame Design
- Pumps Abrasive Materials
- Backed by AST Warranty
- Flow Up to 1.5 gpm
- Fluid Pressures Up to 2,000 PSI
- Viscosities Up to 100,000 CPS
- Variable Flow Rate
- Continuous Flow



PCH DRP-6424

PRODUCT SPECIFICATIONS

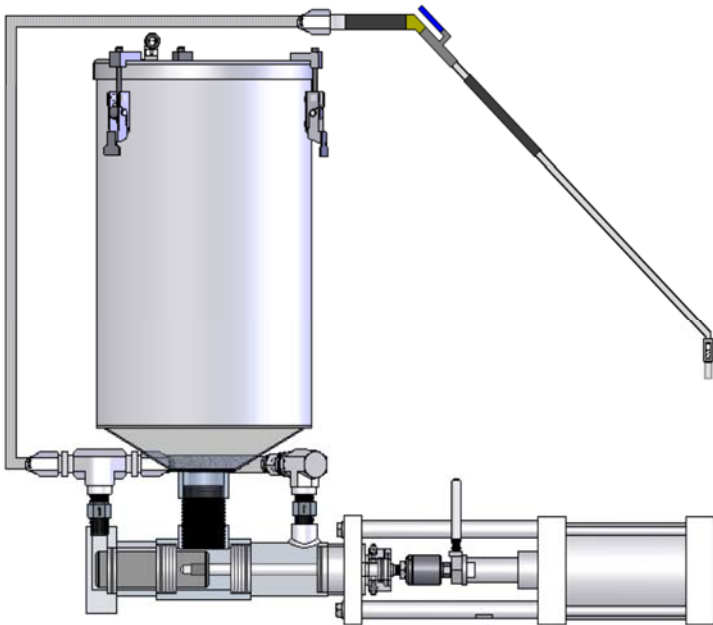

Applications for the PCH DRP-6424 using abrasive urethanes and epoxies include:

- Large Joint Sealing
- Spall Repair
- Urethane
- Joint Filling
- Concrete Restoration
- Crack Injection
- General Pumping
- Abrasive

MODEL	PCH DRP-624 & 424	CONTROLS	Pneumatic; variable speed
MACHINE TYPE	Portable dispensing DRP rod	DOUBLE ACTING PUMP	Heavy duty AST DRP Rod pump
CONTINUOUS OUTPUT	Up to 1.5 gallons per minute	DIMENSIONS	130 lbs. empty' shipping weight 200 lbs.
CONTAINER	6 gallon disposable liner with stainless steel support tank	GAUGE	Glycerin filled
VISCOSITY RANGE	1 CPS to 100,000 CPS	HOSE	High pressure nylon; 3/8" x 15'
SERVICES REQUIRED	90 psi, 4-8 cfm	APPLICATORS	AST hand held manual valve
RATIO RANGE	4:1 to 30:1	OPTIONS	➢ Automatic dispense valve ➢ Heated tanks ➢ Pressurized tanks ➢ Spray attachment ➢ Stainless steel

ADHESIVE SYSTEMS TECHNOLOGY CORP.

1600 FREEWAY BLVD. • BROOKLYN CENTER, MN 55430

Phone: 763-592-2060 • WWW.AST-CORP.NET