



**METER-MIX DISPENSE  
EQUIPMENT**

**METERING & DISPENSING EQUIPMENT FOR THE PROFESSIONAL CONTRACTOR**

## **SOC-050 "HUSKIE"**

**JOINT FILLING & SEALING USING UNFILLED  
POLYUREAS, URETHANES AND EPOXIES**



### **FEATURES & BENEFITS**


- Portable, Reliable, Rugged Design
- Easy to Operate & Maintain
- Stainless Steel Construction
- Changeable Ratios
- 6 Gallon Polyethylene Tanks
- ½ HP DC Drive Motor
- Manual Dispense Manifold
- Electric Powered

### **\*SINGLE OPERATOR CONTROL\***

- Backed by AST Warranty
- Pumps Non-Abrasive Materials
- Fixed Ratios of 1:1 to 3:1
- Continuous Flow Up to 0.7 GPM
- Fluid Pressures Up to 750 PSI
- Viscosities Up to 5,000 CPS
- Variable Flow Rate
- Uses AST GMP Metering Pumps



**SOC-050**

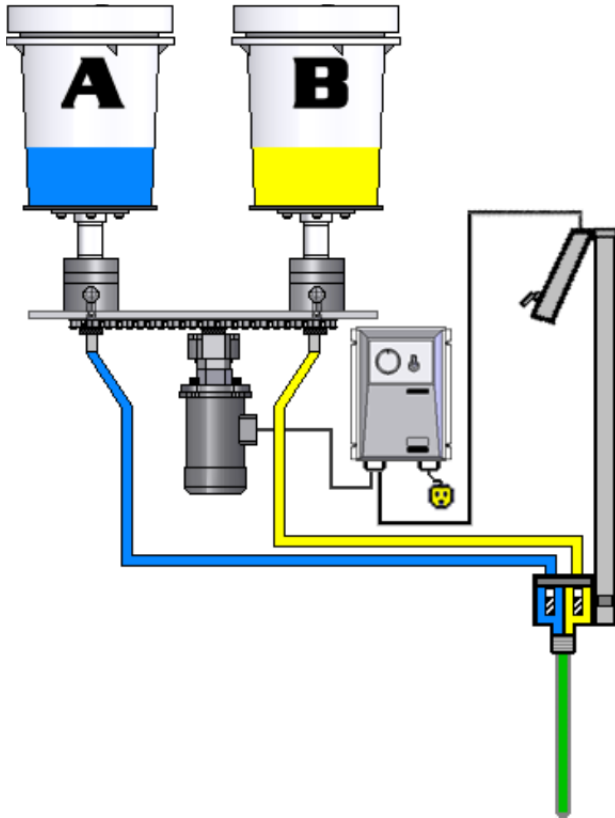

## THE AST ADVANTAGE

- Higher volume output
- Verified ratio accuracy of 99.5%
- 10 Minute End of the Day system clean up
- Ability to externally lubricate pumps, reducing shut-down time
- Gear box addition (increases low end torque)
- Ability for pumps to reground, rebuilt & brought back to tolerance
- Individual shut-off valves on manifold block
- Locking Lids
- Compact Layout
- Larger Manifold port holes
- Replaceable Tanks
- Stainless Steel braided Teflon lined hoses
- Absence of right angles in dispense valve block
- Replacement parts available for same day shipment
- Finger touch controls with upright operation
- 30 years of proven, unmatched performance & reliability
- Knowledgeable & friendly technical support staff

<b>MODEL</b>	GMP-050	<b>FRAME</b>	1-1/2" powder coated tubular steel
<b>MACHINE TYPE</b>	Fixed ratio/metering/dispensing; GMP gear	<b>CONTINUOUS OUTPUT</b>	Up to 0.7 gallons per minute
<b>RATIO RANGE</b>	1:1 to 3:1	<b>VISCOSITY RANGE</b>	100 CPS to 5,000 CPS
<b>STANDARD CONTROLS</b>	On/Off; variable speed	<b>SERVICES REQUIRED</b>	120 V. / 8 AMP
<b>CONTAINERS</b>	6 gallons each side	<b>APPLICATORS</b>	AST hand held, manual dual port manifold
<b>MOTOR</b>	½ HP drive, 90 volt	<b>MIXER</b>	Disposable, plastic, motionless
<b>METERING PUMPS</b>	(2) heavy duty AST GMP gearotor™	<b>HOSES</b>	3/8" x 15', Stainless Steel braided, Teflon lined
<b>DIMENSIONS</b>	32" L x 22" W x 37" H; 150 lbs. empty	<b>OPTIONS</b>	➤ Automatic dispense valve ➤ Battery mount

ADHESIVE SYSTEMS TECHNOLOGY CORP.  
1600 FREEWAY BLVD • BROOKLYN CENTER, MN 55430  
Phone: 763-592-2060 • WWW.AST-CORP.NET