



**ADHESIVE SYSTEMS  
TECHNOLOGY CORP**

**METER-MIX DISPENSE  
EQUIPMENT**

# PCH DRP-6424



## APPLICATIONS

- Joint Filling
- Spray


## MATERIALS

- Filled & Abrasive  
Urethanes
- Filled & Abrasive  
Epoxies

## FEATURES AND BENEFITS

- Portable
- Reliable, rugged design
- Easy to Operate and Maintain
- Uses AST Double Acting Rod Pump
- 6 Gallon Stainless Steel Tank
- Disposable Liner Assembly
- Pneumatic Powered
- Compact Frame Design
- Pumps Abrasive Materials
- Backed by AST Warranty
- Flow Up to 1.5 gpm
- Fluid Pressures Up to 2,000 PSI
- Viscosities Up to 100,000 CPS
- Fixed Ratios of 4:1 to 20:1
- Variable Flow Rate
- Continuous Flow

## PRODUCT SPECIFICATIONS

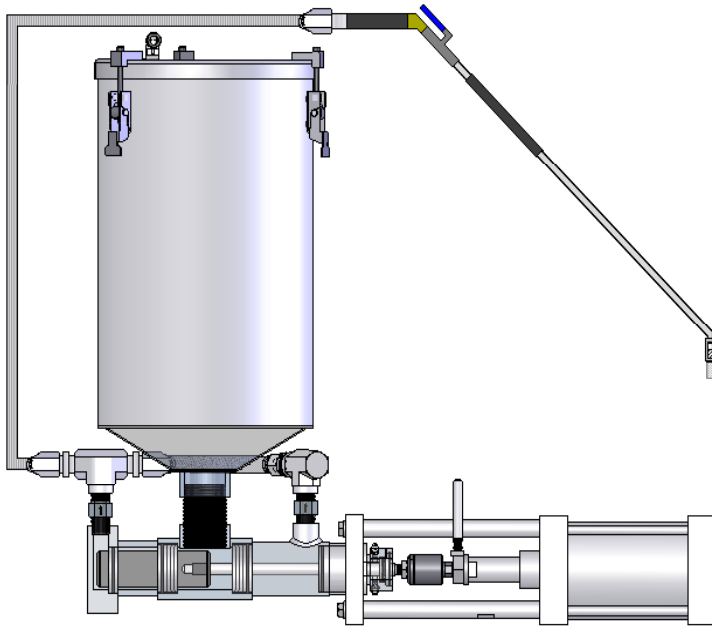

**Applications for the PCH DRP-6424 using abrasive urethanes and epoxies include:**

- Large Joint Sealing
- Spall Repair
- Urethane
- Joint Filling
- Concrete Restoration
- Crack Injection
- General Pumping
- Abrasive

<b>MODEL</b>	PCH DRP-624 & 424	<b>GAUGE</b>	Glycerin filled
<b>MACHINE TYPE</b>	Portable dispensing DRP rod	<b>STANDARD CONTROLS</b>	Pneumatic; variable speed
<b>CONTINUOUS OUTPUT</b>	Up to 1.5 gallons per minute	<b>SERVICES REQUIRED</b>	90 psi, 4-8 cfm
<b>RATIO RANGE</b>	4:1 to 30:1	<b>APPLICATORS</b>	AST hand held manual valve
<b>VISCOSITY RANGE</b>	1 CPS to 100,000 CPS	<b>HOSES</b>	High pressure nylon; 3/8" x 15'
<b>CONTAINER</b>	6 gallon disposable liner with stainless steel support tank	<b>OPTIONS</b>	Automatic dispense valve Heated tanks, Pressurized tanks Spray attachment Stainless steel
<b>DOUBLE ACTING PUMP</b>	Heavy duty AST DRP Rod pump		
<b>DIMENSIONS</b>	130 lbs. Empty, shipping weight 200 lbs.		

**ADHESIVE SYSTEMS TECHNOLOGY CORP.**  
9000 Science Center Drive, New Hope, MN 55428  
Phone: 763-592-2060 • Fax: 763-592-2075  
www.ast-corp.net • ast@ast-corp.net