



## METER-MIX DISPENSE EQUIPMENT

METERING & DISPENSING EQUIPMENT FOR THE PROFESSIONAL CONTRACTOR

# PCH GMP-025 "LIL' PRO"



## APPLICATIONS

- Joint Filling
- Concrete Restoration
- Small Joint Sealing
- Small Spall Repair
- Anchoring

## MATERIALS

- Polyureas
- Unfilled Urethanes
- Unfilled Epoxies


## FEATURES & BENEFITS

- Portable, Reliable, Rugged Design
- Easy to Operate & Maintain
- Stainless Steel Construction
- Changeable Ratios
- 5 or 9 Gallon Stainless Steel Tanks
- ¼ HP DC Drive Motor
- Manual Dispense Manifold
- Electric Powered
- Backed by AST Warranty
- Pumps Non-Abrasive Materials
- Fixed Ratios of 1:1 to 4:1
- Continuous Flow Up to 0.4 GPM
- Fluid Pressures Up to 750 PSI
- Viscosities Up to 5,000 CPS
- Variable Flow Rate
- Uses AST GMP Metering Pumps



# PCH GMP-025

## PRODUCT SPECIFICATIONS

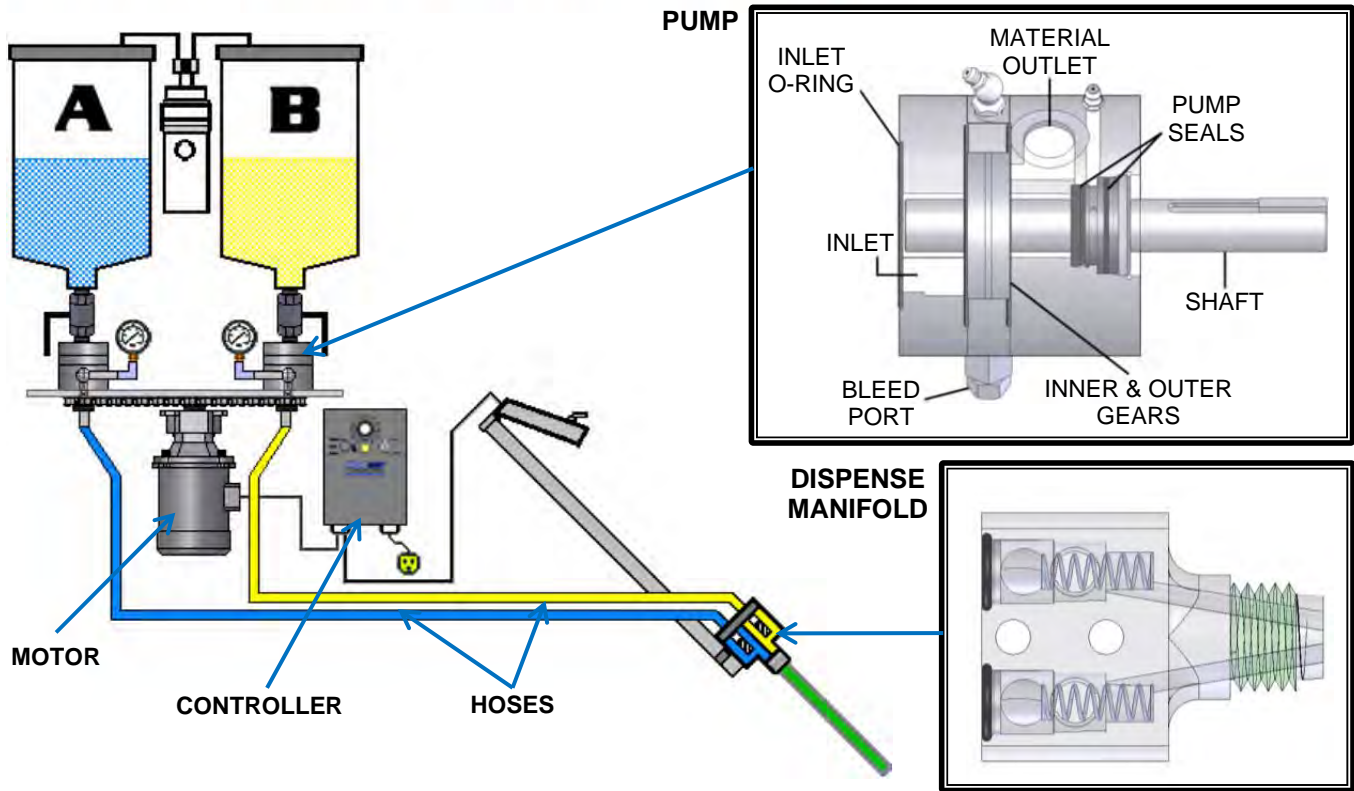

<b>MODEL</b>	PCH GMP-025	<b>FRAME</b>	1½" powder coated tubular steel
<b>MACHINE TYPE</b>	Fixed ratio/metering/dispensing; GMP gear	<b>CONTINUOUS OUTPUT</b>	Up to 0.4 gallons per minute
<b>RATIO RANGE</b>	1:1 to 4:1	<b>VISCOSITY RANGE</b>	100 CPS to 5,000 CPS
<b>GAUGES</b>	(2) glycerin filled, 600 psi	<b>AIR DRYER</b>	Desiccant cartridge
<b>STANDARD CONTROLS</b>	On/Off; variable speed	<b>SERVICES REQUIRED</b>	120 V. / 8 AMP
<b>CONTAINERS</b>	5 gallons each side, stainless steel, 16 gauge	<b>APPLICATORS</b>	AST hand held; manual dual port manifold
<b>MOTOR</b>	¼ HP drive, 90 volt	<b>MIXER</b>	Disposable, plastic, motionless
<b>METERING PUMPS</b>	(2) heavy duty AST GMP gearotor™	<b>HOSES</b>	Teflon core braided stainless steel, 3/8" x 15'
<b>DIMENSIONS</b>	24" L x 24" W x 40" H 150 lbs. empty, shipping weight 215 lbs.	<b>OPTIONS</b>	<ul style="list-style-type: none"> <li>➢ Automatic dispense valve</li> <li>➢ Heated tanks,</li> <li>➢ Generator mount</li> </ul>

ADHESIVE SYSTEMS TECHNOLOGY CORP.  
 9000 SCIENCE CENTER DRIVE • NEW HOPE, MN 55428  
 Phone: 763-592-2060 • WWW.AST-CORP.NET