



METER-MIX DISPENSE EQUIPMENT

METERING & DISPENSING EQUIPMENT FOR THE PROFESSIONAL CONTRACTOR

PCH GMP-025 "LIL' PRO"



APPLICATIONS

- Joint Filling
- Concrete Restoration
- Small Joint Sealing
- Small Spall Repair
- Anchoring

MATERIALS

- Polyureas
- Unfilled Urethanes
- Unfilled Epoxies


FEATURES & BENEFITS

- Portable, Reliable, Rugged Design
- Easy to Operate & Maintain
- Stainless Steel Construction
- Changeable Ratios
- 5 or 9 Gallon Stainless Steel Tanks
- ¼ HP DC Drive Motor
- Manual Dispense Manifold
- Electric Powered
- Backed by AST Warranty
- Pumps Non-Abrasive Materials
- Fixed Ratios of 1:1 to 4:1
- Continuous Flow Up to 0.4 GPM
- Fluid Pressures Up to 750 PSI
- Viscosities Up to 5,000 CPS
- Variable Flow Rate
- Uses AST GMP Metering Pumps



PCH GMP-025

PRODUCT SPECIFICATIONS

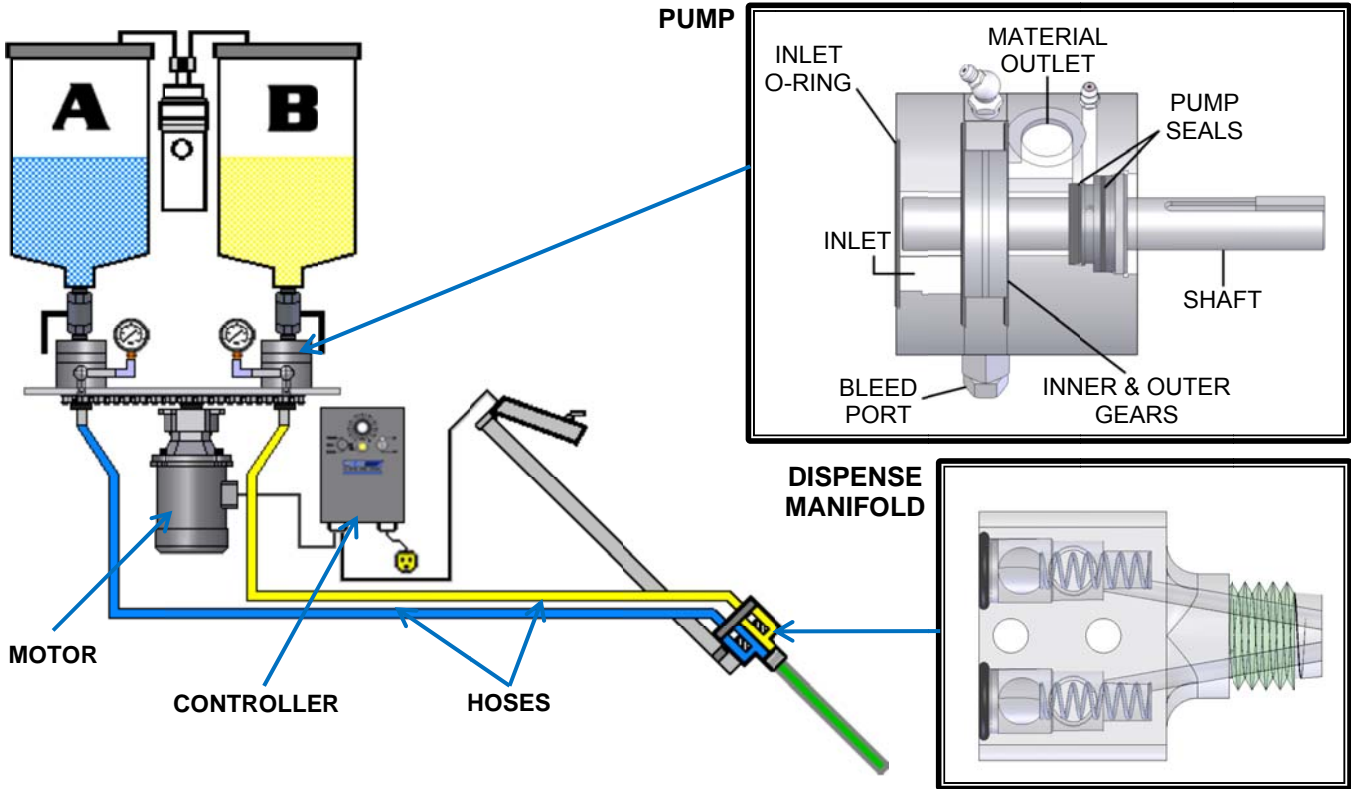

MODEL	PCH GMP-025	FRAME	1½" powder coated tubular steel
MACHINE TYPE	Fixed ratio/metering/dispensing; GMP gear	CONTINUOUS OUTPUT	Up to 0.4 gallons per minute
RATIO RANGE	1:1 to 4:1	VISCOSITY RANGE	100 CPS to 5,000 CPS
GAUGES	(2) glycerin filled, 600 psi	AIR DRYER	Desiccant cartridge
STANDARD CONTROLS	On/Off; variable speed	SERVICES REQUIRED	120 V. / 8 AMP
CONTAINERS	6 gallons each side, stainless steel, 16 gauge	APPLICATORS	AST hand held; manual dual port manifold
MOTOR	¼ HP drive, 90 volt	MIXER	Disposable, plastic, motionless
METERING PUMPS	(2) heavy duty AST GMP gearotor™	HOSES	Teflon core braided stainless steel, ¾" x 15'
DIMENSIONS	24" L x 24" W x 40" H 150 lbs. empty, shipping weight 215 lbs.	OPTIONS	<ul style="list-style-type: none"> ➤ Automatic dispense valve ➤ Heated tanks, ➤ Generator mount

ADHESIVE SYSTEMS TECHNOLOGY CORP.
 1600 FREEWAY BLVD • BROOKLYN CENTER, MN 55430
 Phone: 763-592-2060 • WWW.AST-CORP.NET